


# BIG ELEPHANT WIRE ROPE HOIST

TYPE : DOUBLE-RAIL • SPEED : HOISTING DUAL SPEED (3:1) TRAVERSING DUAL SPEED

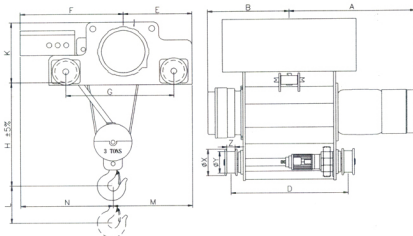

CAP		2	3	5	7.5	10	
Hoisting	M/min	50Hz	5.6/1.8	5.4/1.8	5.4/1.8	4.2/1.4	4.8/1.6
		60Hz	6.8/2.2	6.5/2.1	6.5/2.1	5.2/1.7	5.8/1.9
	Kw	50Hz	3&1	5.5&1.5	7.5&2.2	7.5&2.2	11&3.7
		60Hz				11&3.7	15&5.5
Traversing	M/min	50Hz	16/5.3	15/5	15/5	13/4.3	13/4.3
		60Hz	19/6.3	18/6	18/6	16/5.3	16/5.3
	Kw	50Hz	0.37/0.12	0.37/0.12	0.75/0.25	0.75/0.25	1.1/0.36
		60Hz					
Wire rope	Diameter	Ø8	Ø10	Ø12	Ø14	Ø16	
	Struct	6 X 37					
	Nos	4					
Ed percent		High / Low speed : 40% / 25% ED (JEM 1393 III)					
Ambient temperature		-10°C to 40°C					
Protective construction		Weather proof type (Attach rain cover if using outdoors) JP 44 (IP 54) equivalent					
Power supply		3Ø 220V-600V 60Hz/50Hz					

CAP	TYPE	Approximate Dimension (mm)													Kg	
		L	A	B	D	E	F	G	K	H	N	M	X	Y		Z
2 T	BWAX-020	6	680	435	650	360	560	584	310	520	516	404	150	120	40	350
		9	755	510	800											370
		12	830	585	950											390
3 T	BWAX-030	6	755	490	700	410	610	640	365	630	546	474	160	130	50	450
		9	855	590	900											480
		12	955	690	1100											510
5 T	BWAX-050	6	945	555	800	475	610	765	435	710	558	527	180	150	50	720
		9	1060	665	1000											770
		12	1165	775	1250											820
7.5 T	BWAX-075	6	1150	715	950	530	680	865	495	825	615	595	200	170	60	895
		9	1200	765	1050											950
		12	1250	815	1150											1005
10 T	BWAX-100	6	1110	750	950	605	705	900	540	885	641	669	220	180	60	1170
		9	1010	850	1150											1255
		12	1290	930	1300											1340