


BIG ELEPHANT WIRE ROPE HOIST

TYPE : DOUBLE-RAIL • SPEED : SINGLE SPEED (FAST)

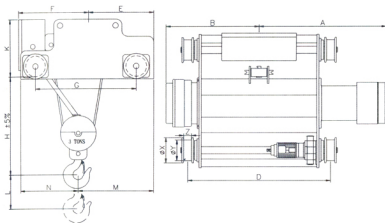

CAP		2	3	5	7.5	10	15	20	25		
Lift		6(L)		9(M)		12(H)		9(M) 12(H)			
Hoisting	M/min	50Hz	5.6	5.4	5.4	4.2	4.8	4.3	4.0	3.8	
		60Hz	6.8	6.5	6.5	5.2	5.8	5.2	4.8	4.6	
	Kw	50Hz	3.7	5.5	7.5	7.5	11	15	18.5	22	
		60Hz				11	15	18.5	22	30	
Traversing	M/min	50Hz	16	15	15	13	13	13	12	12	
		60Hz	19	18	18	16	16	16	15	15	
	Kw	50Hz	0.37	0.37	0.75	0.75	1.1	1.1	1.5	2.2	
		60Hz									
Wire rope	Diameter		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø22.4	Ø25	
	Struct		6 X 37								
	Nos		4								
Ed percent		High / Low speed : 40% / 25% ED (JEM 1393 II)									
Ambient temperature		-10°C to 40°C									
Protective construction		Weather proof type (Attach rain cover if using outdoors) J.P. 44 (IP 54) equivalent									
Power supply		3Ø 220V-600V 60Hz/50Hz									

CAP	TYPE	Approximate Dimension (mm)													Kg	
		L	A	B	D	E	F	G	K	H	N	M	X	Y		Z
2 T	BWAN-020	6	600	435	650	360	550	584	310	520	506	404	150	120	40	280
		9	675	510	800											310
		12	750	585	950											340
3 T	BWAN-030	6	700	490	700	410	445	640	365	630	391	474	160	130	50	420
		9	800	590	900											460
		12	900	690	1100											500
5 T	BWAN-050	6	790	555	800	475	525	765	435	710	473	527	180	150	50	610
		9	900	665	1000											660
		12	1010	775	1250											710
7.5 T	BWAN-075	6	980	715	950	530	570	865	495	825	505	595	200	170	60	910
		9	1025	765	1050											980
		12	1075	815	1150											1050
10 T	BWAN-100	6	1010	750	950	545	605	900	540	885	481	669	220	180	60	1160
		9	1110	850	1150											1240
		12	1190	930	1300											1310
15 T	BWAN-150	6	995	780	1000	665	635	1000	640	1110	540	760	250	210	60	1850
		9	1095	880	1200											1930
		12	1195	980	1400											2010
20 T	BWAN-200	9	1255	880	1200	750	750	1150	725	1030	674	826	290	250	60	2530
		12	1355	980	1400											2650
25 T	BWAN-250	9	1310	1325	1400	800	870	1300	860	1155	732	938	320	275	60	3745
		12	1410	1425	1600											3935