


# BIG ELEPHANT WIRE ROPE HOIST

- TYPE : MONORAIL
- SPEED : SINGLE SPEED (FAST)

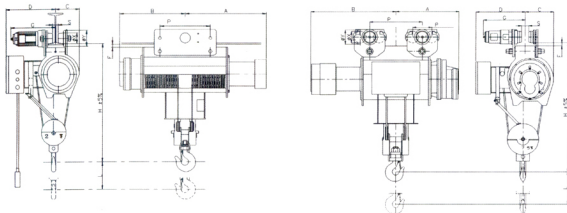

CAP			0.5	1	2	3	5	7.5	10	15						
Lift			6(L)		9(M)		12(H)									
Hoisting	M/min	50Hz	8.3	6.0	5.6	5.4	5.4	4.2	4.8	4.3						
		60Hz	10.0	7.2	6.8	6.5	6.5	5.2	5.8	5.2						
	Kw	50Hz	1.5	1.5	3.7	5.5	7.5	7.5	11	15						
		60Hz						11	15	18.5						
Traversing	M/min	50Hz	15	15	15	14	13	13	13	12						
		60Hz	18	18	18	17	16	16	16	15						
	Kw	50Hz	0.37	0.37	0.37	0.37	0.75	0.75x2	0.75x2	1.1x2						
		60Hz														
Wire rope	Diameter		∅8		∅10 & ∅8		∅10		∅12		∅14		∅16		∅20	
	Struct		6 X 37													
	Nos		2			2&4			4							
Ed percent			High / Low speed : 40% / 25% ED (JEM 1393 III)													
Ambient temperature			-10°C to 40°C													
Protective construction			Weather proof type (Attach rain cover if using outdoors) JP 44 (IP 54) equivalent													
Power supply			3∅ 220V ~600V 60Hz/50Hz													

CAP	TYPE	Approximate Dimension (mm)												Kg
		L	A	B	C	D	F	X	Y	G	S	H	P	
0.5T	BECN-005	∅	400	325	145	410	26	74	118	365	13	835	163	140
		9	455	380										150
		12	505	430										160
1 T	BECN-010	∅	400	335	145	410	26	74	118	365	13	835	163	140
		9	455	385										150
		12	505	435										160
2 T	BECN-020	∅	535	350	195	420	22	85	129	380	46	960	180/200	200
		9	570	380										230
		12	620	435										260
	BEAN-020	∅	560	435										255
		9	630	510										280
		12	710	590										300
3 T	BEAN-030	∅	705	485	200	510	25	95	138	385	38	1140	178/380	390
		9	805	585										430
		12	900	690										460
5 T	BEAN-050	∅	790	555	470	475	23	135	168	470	32	1200	217/420	585
		9	900	665										610
		12	1005	770										700
7.5 T	BEAN-075	∅	975	720	325	565	38	135	168	480	82	1480	217/600	1130
		9	1025	770										1260
		12	1075	820										1370
10 T	BEAN-100	∅	1010	750	650	550	30	150	180	650	71	1570	239/600	1130
		9	1110	850										1230
		12	1190	930										1330
15 T	BEAN-150	∅	990	780	680	600	22	190	230	680	64	1800	305/600	1600
		9	1090	880										1800
		12	1190	980										2000