


BIG ELEPHANT WIRE ROPE HOIST

TYPE : MONORAIL • SPEED : SINGLE SPEED (SLOW)

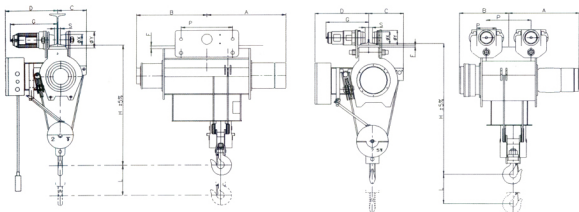

CAP		2	3	5	7.5	10	15	20	
Lift		6(L)	9(M)	6(L)	9(M)	12(O)	12(O)	12(O)	
Hoisting	M/min	50Hz	3.0	2.9	2.9	3.0	2.5	2.5	
		60Hz	3.6	3.5	3.5	3.6	3.0	3.0	
	Kw	50Hz	1.5	3.7	5.5	5.5	7.5	11	
		60Hz							
Traversing	M/min	50Hz	15	14	13	13	13	12	
		60Hz	18	17	16	16	16	15	
	Kw	50Hz	0.37	0.37	0.75	0.75X2	0.75X2	1.1X2	
		60Hz							
Wire rope	Diameter		Ø8	Ø10	Ø12	Ø14	Ø14	Ø20	
	Struct		6 X 37						Ø22.4
	Nos		2	2&4	4				
Ed percent		High / Low speed : 40% / 25% ED (JEM 1393 III)							
Ambient temperature		-10°C to 40°C							
Protective construction		Weather proof type (Attach rain cover if using outdoors) JP 44 (IP 54) equivalent							
Power supply		3Ø 220V-600V 60Hz/50Hz							

CAP	TYPE	Approximate Dimension (mm)											Kg	
		L	A	B	C	D	F	X	Y	G	S	H		P
2 T	BEBN-020	6	525	460	225	420	22	85	129	380	46	920	175/390	255
		9	600	535										280
3 T	BEBN-030	6	560	435	265	540	22	95	138	385	38	1110	178/380	300
		9	630	510										330
5 T	BEBN-050	6	735	525	470	475	23	135	168	470	32	1225	217/420	480
		9	800	590										520
		12	900	690										560
7.5 T	BEBN-075	6	790	550	390	605	20	135	168	480	82	1480	217/500	825
		9	900	665										875
		12	1005	770										925
10 T	BEBN-100	6	865	720	325	550	30	150	180	550	71	1630	239/600	1905
		9	915	770										1105
		12	965	820										1165
15 T	BEBN-150	6	970	750	430	670	22	190	230	650	66	2000	305/600	1655
		9	1070	850										1765
		12	1150	930										1875
20T	BEBN-200	6	1025	780	550	685	22	190	230	675	69	1860	305/620	2020
		9	1125	880										2150
		12	1225	980										2280